



FITTING INSTRUCTIONS

Part Number: **3215110/120 F/Kit 6172318**

Product **ARB DELUXE NON WINCH BULL BAR**

Description:

Suited to **TOYOTA LANDCRUISER 200 SERIES 2007 ON**

vehicle/s: **Note: 3215110 NO HLC, 3215120 WITH HLC (SAHARA)**

WARNING

REGARDING VEHICLES EQUIPPED WITH SRS AIRBAG:

When installed in accordance with these instructions, the front protection bar does not affect operation of the SRS airbag.

ALSO, NOTE THE FOLLOWING:

- ◆ This product must be installed exactly as per these instructions using only the hardware supplied.
- ◆ In the event of damage to any bull bar component, contact your nearest authorised ARB stockist. Repairs or modifications to the impact absorption system must not be attempted.
- ◆ Do not use this product for any vehicle make or model, other than those specified by ARB.
- ◆ Do not remove labels from this bull bar.
- ◆ This product or its fixing must not be modified in any way.
- ◆ The installation of this product may require the use of specialized tools and/or techniques
- ◆ It is recommended that this product is only installed by trained personnel
- ◆ These instructions are correct as at the publication date. ARB Corporation Ltd. cannot be held responsible for the impact of any changes subsequently made by the vehicle manufacturer
- ◆ During installation, it is the duty of the installer to check correct operation/clearances of all components
- ◆ Work safely at all times
- ◆ Unless otherwise instructed, tighten fasteners to specified torque

ARB 4x4 ACCESSORIES

Corporate Head Office

42-44 Garden St
Kilsyth, Victoria
AUSTRALIA 3137

Tel: +61 (3) 9761 6622
Fax: +61 (3) 9761 6807

Australian enquiries
North & South American enquiries
Other international enquiries

sales@arb.com.au
sales@arb.com.au
exports@arb.com.au

www.arb.com.au

GENERAL CARE AND MAINTENANCE

By choosing an ARB Bar, you have bought a product that is one of the most sought after 4WD products in the world. Your bar is a properly engineered, reliable, quality accessory that represents excellent value. To keep your bar in original condition it is important to care and maintain it following these recommendations:



- Prior to exposure to the weather your bar should be treated to a Canuba based polish on all exposed surfaces. It is recommended that this is performed on a six monthly basis or following exposure to salt, mud, sand or other contaminants.
- As part of any Pre Trip Preparation, or on an annual basis, it is recommended that a thorough visual inspection of the bar is carried out, making sure that all bolts and other components are torqued to the correct specification. Also check that all wiring sheaths, connectors, and fittings are free of damage. Replace any components as necessary. This service can be performed by your local authorized ARB Stockist.

FITTING REQUIREMENTS

REQUIRED TOOLS FOR FITMENT OF PRODUCT:

Metric socket and spanner sets 8-25mm range	External Circlip pliers
Screwdrivers, Philips and Flat blade	Power Jigsaw with blade for plastic cutting
Short Body Power Drill 13mm (1/2") capacity	Dia 7.0mm (5/16") and 10.5mm (25/64") drill bits
Tin snips	Marking pen
Half round file	Soft Hammer
Metric hex key set	Loctite© 262 or equiv.
Wide masking tape	Stanley knife
Small Spirit Level	Tape Measure & 2 x 300 mm Rulers
If fitting parking sensors: Dia 22.0 (7/8") hole saw	Paint black fast drying

HAVE AVAILABLE THESE SAFETY ITEMS WHEN FITTING PRODUCT:

Protective eyewear		Hearing protection	
--------------------	-------------------------------------------------------------------------------------	--------------------	---------------------------------------------------------------------------------------

NOTE: 'WARNING' notes in the fitting procedure relate to OHS situations, where to avoid a potentially hazardous situation it is suggested that protective safety gear be worn or a safe work procedure be employed. If these notes and warnings are not heeded, injury may result.

FASTENER TORQUE SETTINGS:

SIZE	Torque Nm	Torque lbft
M6	9Nm	7lbft
M8	22Nm	16lbft
M10	44Nm	32lbft
M12	77Nm	57lbft

OPTIONAL LIGHT SETS TO SUIT THIS PRODUCT:


- ◆ FOG LAMP SET P# 6821201 ADD GXL ONLY P#MD02 LOOM KIT, P#180209 SWITCH AND P#180215 SWITCH CAP FOR FOGS
- ◆ UP TO IPF 900 SERIES FOG OR DRIVING LIGHT SETS
- ◆ IPF 840 FYS FOG LIGHTS CAN BE FITTED TO LOWER PAN AREA

PARTS LISTING			
APPLICATION.	PART NO.	QTY	DESCRIPTION
Mount Brackets To Chassis	3757602R	1	Bracket Mount RHS
	3757602L	1	Bracket Mount LHS
	6151428	2	Flange Nut M12
	6151429	2	Chassis Stud M12 x 265 x 1.75
	6151396	2	Nut Clevis
	5846400	2	Packer M12 x 8mm
Bull Bar To Mount Bracket Assy	6151357	2	SEMS Bolt M10 x 1.5 x 30mm
	6151321	2	Nut Flanged M10 x 1.5
	6151255	6	Bolt M12 x 1.75 x 40mm
	6151189	6	Nut M12 x 1.75
	4581049	12	Washer Flat M12
	4581050	6	Washer Spring M12
Stone Tray to Bull Bar	6522694	1	Stone Tray
	6151300	4	Nut Cage M6
	6151213	4	Bolt M6 x 20mm
	4581082	6	Washer Flat M6 x 16 x 3
	4581287	6	Washer Spring M6
	6151270	2	Bolt M6 x 40
	4721518	2	Spacer Tube 18mm
Number Plate To Bull Bar	6821189	2	Grommet round
	6151384	2	Screw self tapping pan head
	6781408	1	Tape double sided
Wing Inner Panels	6522685R	1	Panel Inner Wing RH
	6522685L	1	Panel Inner Wing LH
	6151300	10	Nut Caged M6
	6151213	10	Bolt M6 x 20 Blk
	4581082	10	Washer Flat M6 Blk
	4581287	10	Washer Spring M6 Blk
	6151234	2	Bolt M8
	4581045	2	Washer Flat M8
	4581047	2	Washer Spring M8
6151132	2	Nut M8 Flanged	
Buffers	3163018R	1	Buffer
	3163018L	1	Buffer
	6151128	12	Nut M6 Flanged
Lights	3163015	1PR	Light Surround Set
	6821151R	1	Indicator
	6821151L	1	Indicator
	6821152	2	Loom
	180701	6	Scotch Locks
	180302	6	Cable Ties
Miscellaneous	6191019	2	Trim Pinch Weld
	3786342	1	Template Bumper Cutting
	EG50	2	Grommet Dia 50mm
	5868356	3	Packer

REMOVAL OF BUMPER



1. Remove number plate

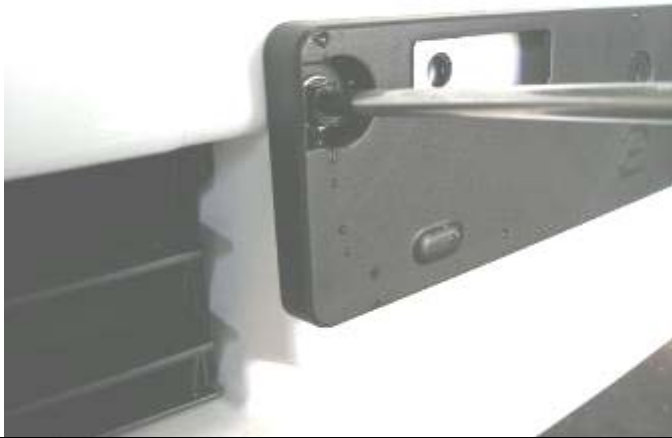

2. Remove number plate mount bracket



3. Remove inner guard bumper retaining screws three per side using M4 hex key



4. Remove lower trim panel sets each side which attach to bumper and engine protective plate area then set aside, they will not be reused.

REMOVAL OF BUMPER



5. When removing lower trim panels, a plastic nut located on each side will need to be prized open with a small flat blade screwdriver to assist removal.



6. Remove lower bumper retaining screws.




7. Remove plastic engine bay cover above grille area and set aside. Prise open plastic plugs with small flat blade screwdriver or similar as shown.




8. Remove 3 X retaining screws from top of grille

MASKING BUMPER FOR TRIMMING

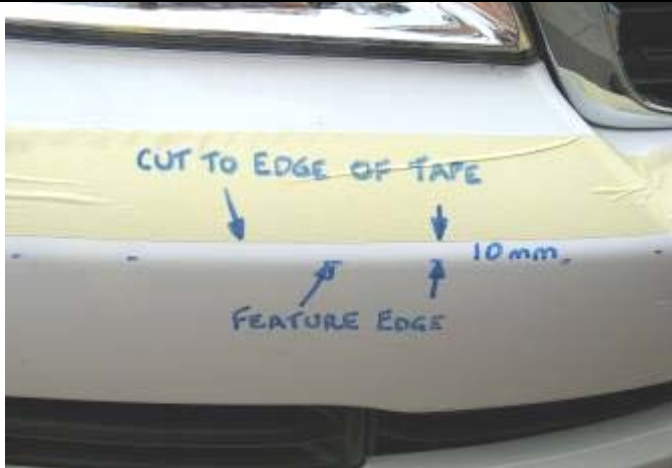

9. Apply wide masking tape edge, carefully aligning 10mm above bumper feature line as shown. Keep the same line level through the centre section of the bumper as shown

Hint: Using a marking pen, run a line or dashed lines along the feature line on the bumper to assist in measuring the 10mm offset for the tape application.

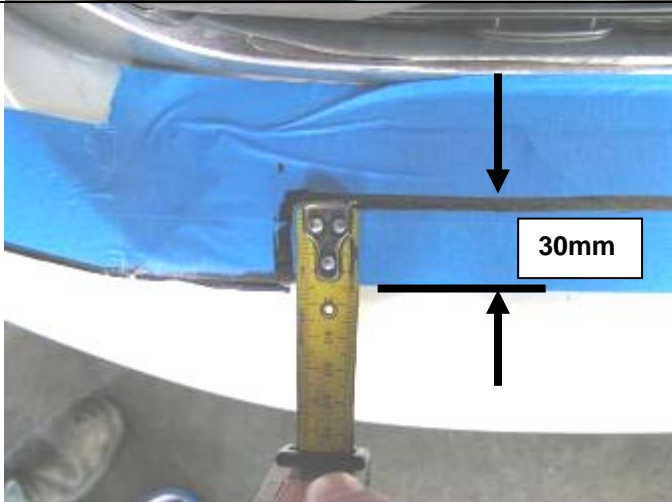

10. Mark out centre cut area of bumper as shown, 740mm wide x 30mm back from feature edge.



11. View of masking tape across bumper for reference.




12. Apply approx.200mm of masking tape with edge exactly 90mm from angled bumper end as shown.

MASKING BUMPER FOR TRIMMING




- Cut A3 paper template along identified cutting line.


NOTE: There is a scale on the sheet to confirm that the template is 1:1 scale, this is critical.

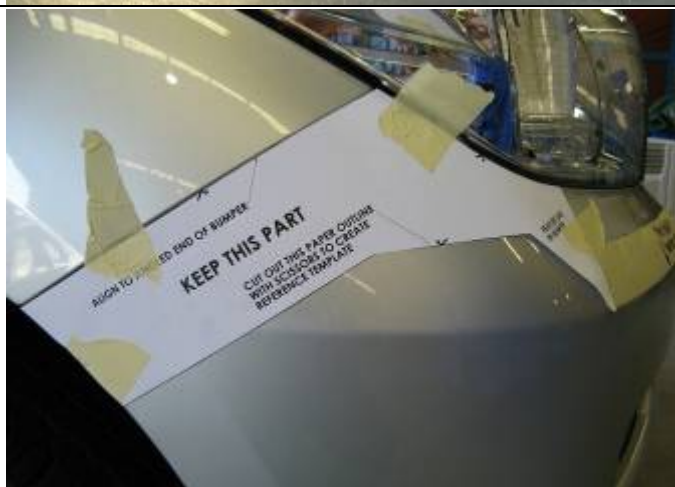

- Apply template to outer corner of RHS bumper as shown aligning accurately to features such as the lower line of headlamp and end of bumper. Tape in position

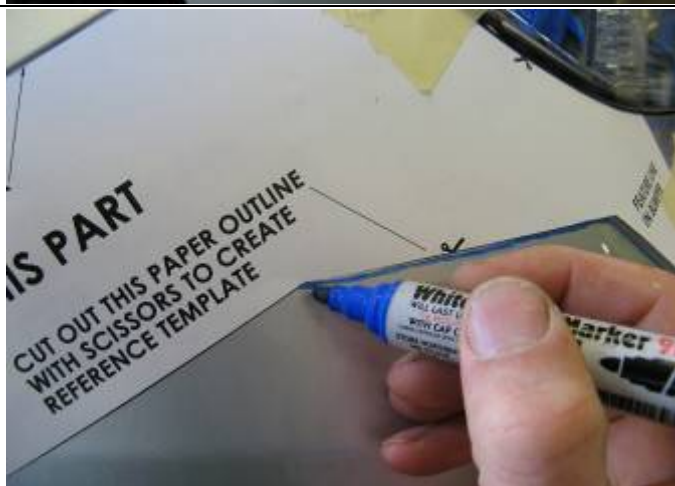

- Transfer cutting line to bumper

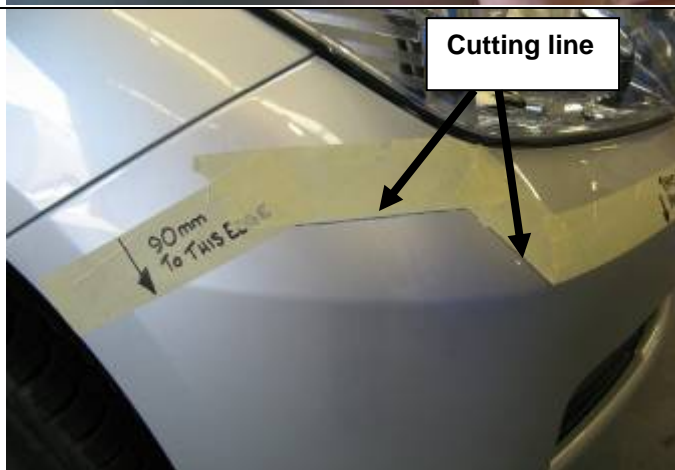

- Apply masking tape aligning edge to marked cut line as shown
- Reverse template and apply to LHS of bumper and follow same steps as RHS.
- The bumper is now marked out for cutting.

REMOVAL OF BUMPER




19. Release top of grille. It is retained by 2 x push in spring clips, located at the outer top sections below the bolt position.

Hint: You can use a small flat blade screwdriver to aid in pushing in spring. Fit spring clips back to grille plugs for easy replacement.



20. Pull outer returns of bumper outwards and out of retaining clips.

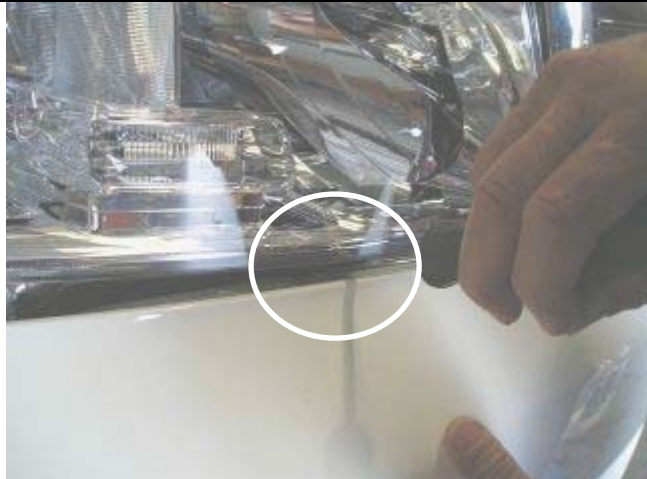

21. Push bumper down immediately below headlamp to gain access with a small flat blade screwdriver and release holding tab.

NOTE: Take care not to damage painted edge of bumper



22. Remove plastic plugs securing upper bumper tabs to cross member.
23. You can now remove the bumper and place on soft non abrasive rug or similar, it is best to do this with the help of another person.
24. If headlight washer system is fitted disconnect the main line from the vehicle to the bumper circuit and clamp/crimp it to prevent washer fluid from leaking out
25. If factory fog lights are fitted, disconnect the fog light harness from the vehicle by opening the white flip over clip on the connector and releasing the loom plug.

NOTE: As bumper is being removed, check that all wiring looms are disconnected.


REMOVAL OF BUMPER Cont.



26. Remove grille from bumper cover by releasing plastic tabs as shown



27. Remove fog light brackets and set aside, these will not be reused
28. Remove headlight washer circuit if fitted and retain for reuse.
29. Remove fog light loom if fitted for reuse.
NOTE: The connectors will need to be removed to allow fitment to bull bar circuit and connection to ARB fog lights.

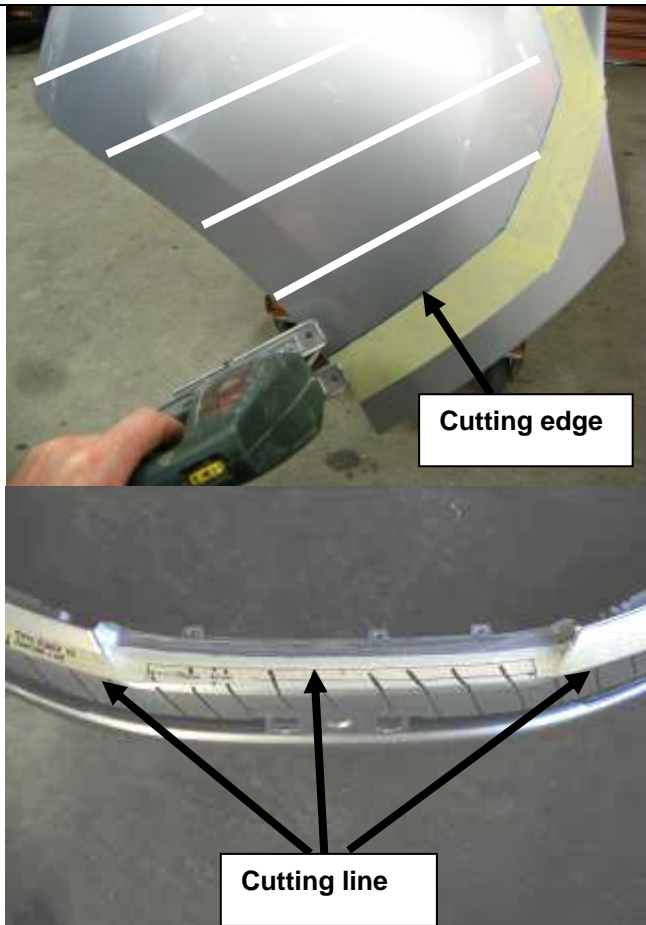

30. Place bumper face up on a bench or similar so there is sufficient access for the cutting operation
31. Using a jigsaw, carefully cut along the edge of the masking tape.
32. Remove burrs from the cut edge of the bumper, then set aside on the soft non abrasive surface.

Warning: Cutting operations can result in flying debris, safety glasses should be worn. Work safely; keep fingers clear of cutting blade.




PREPARATION FOR MOUNT BRACKETS



33. Remove foam absorber bar and set aside, this will not be reused
34. Remove crash bar then beam mount brackets and set aside, retain only M10 flange nuts for reuse.



35. Remove tow hooks and set aside, these will be reused.

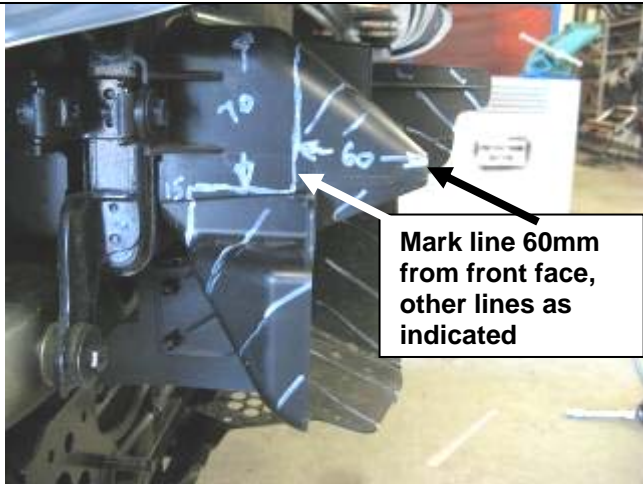

36. Mark the lower section of the air scoop for the power steering radiator as shown. This is for trimming to clear the mount brackets.

Note: The 60 mm line from front as indicated goes right over the top of the scoop and down the other side, then steps back in the same at 70mm from top, then back to 15mm and down as shown this side.




37. Remove scoop and cut using jigsaw or similar and remove burrs.

Warning: Cutting operations can result in flying debris, safety glasses should be worn.



PREPARATION FOR MOUNT BRACKETS

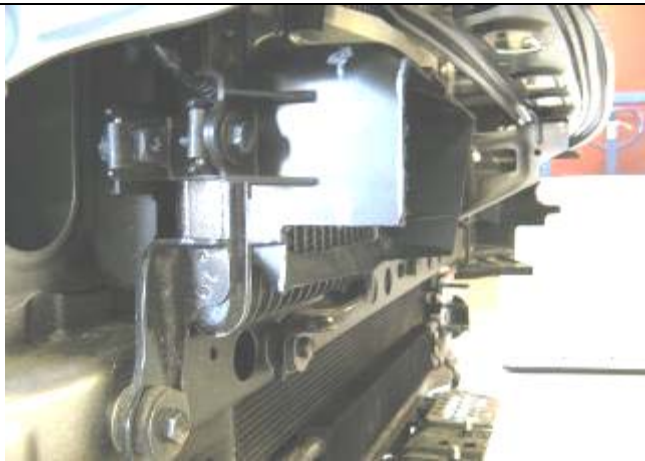

38. Refit to vehicle, it should now look like this.



39. Mark out and trim the air deflector on the LHS of the vehicle using a pair of tin snips or similar.

Hint: You can do this on the vehicle as shown below.



40. Fit the cut bumper and secure.
41. Fit the grille
42. Fit pinch weld to each end of the bumper as shown
43. Secure the wing return in the wheel arch area with one of the original dome head screws each side




44. Fit 2 x large rubber grommets to holes in uprights inside the upper area of the bull bar.
45. If fitting fog lamps, factory loom can be reused and routed through the grommets in uprights and along inside the lower lip of the top pan.
46. If headlight cleaner circuit is to be refitted, run hosing along the underside of the grille cross member, cable tie in position as shown Ensure that the tee is centralised and then cable tie in position

PREPARATION OF BULL BAR



47. Fit 4 x M6 cage nuts to bottom inside face of lower pan in square holes as shown.

Hint: A small flat blade screwdriver may help to press nut cage flanges into hole.

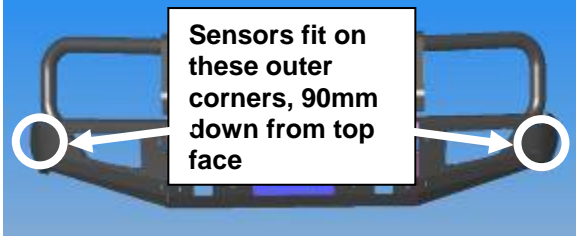

48. If parking sensors are to be fitted, mark out the hole positions, located in the middle of the large corner radius of the wings and 90mm down from the top face. (Similar position to original bumper)

Hint: Use two rules across flat faces to find mid point of radius



Warning: Cutting operations can result in flying debris, safety glasses should be worn.



49. Once Dia 22 (7/8") hole is drilled and **fully deburred**, check that the hole size is actually Dia 22.0 – 22.8mm, better if on larger side. *Trial fit sleeve and sensor.*

50. Once checked use some fast drying primer paint to seal bare edges.



51. Carefully slide top section of buffer past edge of cover strap as shown



52. Adjust buffers so they sit neatly on the bull bar profile then secure using M6 flange nuts over studs.

NOTE: Do not over tighten nuts as damage to buffer may result.

FITTING MOUNT BRACKETS



Packers are supplied to compensate for body to chassis variation if required

53. Insert clevis nut into rectangular hole in the inboard face of chassis, ensuring the threaded end is inserted first.

The nut when fitted correctly should fit square and locate into the chassis rail.



54. Install the chassis stud by fitting 2 nuts to the end of the stud and tightening until thread bottoms out.

55. Remove nuts and repeat for the LHS.



56. Loosely fit the mounting brackets to the chassis securing with the 8mm packers and flange nuts.

57. Secure using existing OE M10 flange nuts, **but do not do up tight.**




58. Tap the outer flange of the mount brackets until they are hard up against the tow hook mount area. Nip up the lowest outboard nut on each bracket. Brackets should be about 935mm apart



FITTING BULL BAR TO VEHICLE



59. With the aid of a lift table or one or more assistants carefully and safely lift, position and bolt the bull bar to the mounts using 6 x M12 bolts, large flat washers and spring washers. Centralise the bar to the front of the vehicle and adjust height.

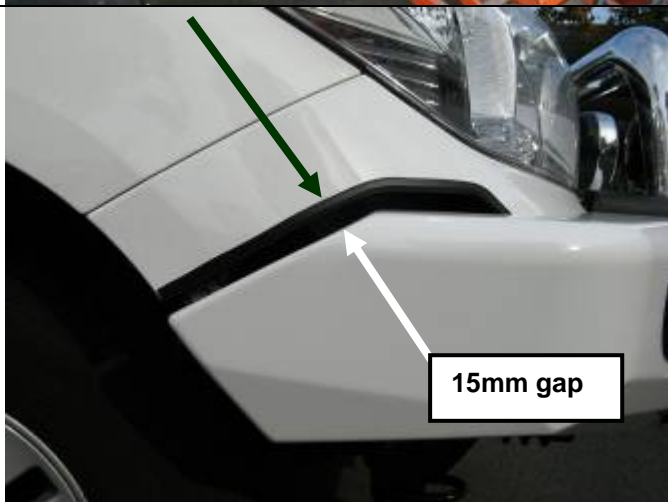

60. Adjust the bar height leaving approximately 15mm gap between top of wing angled face and the pinch weld on bumper.
61. Tighten bar mount M12 bolts
62. Tighten M10 flange nuts to chassis studs to 56Nm.



63. Then tighten up the long M12 chassis studs, ensuring that the clevis nut is positioned correctly over the hole in the chassis.
64. Remove each tow hook bolt in turn, apply loctite © to threads and tighten up.



65. With access through light aperture in wing, using the M10 pilot holes in mount brackets (located up 175mm from bottom face of bar), drill pinning hole through uprights on bull bar. Fit M10 screw, washer set and flange nut and do up tight.



Warning: Drilling operations can result in flying metal debris, safety glasses should be

FITTING BULL BAR TO VEHICLE



66. If headlight cleaner system to be fitted, reconnect circuit at main joint to vehicle and also hoses to tails of spray heads



67. Remove and discard screws and speed nuts on supplied indicators.
68. Using the 25mm long pan head screws in the fitting kit, fit indicators to light surrounds, note that the indicators are handed and drain holes must be on the lowest edge.







69. If fitting fog lamps, refer to instructions supplied with kit.




70. Fit insert assemblies into the wings as shown
71. Fit the 4 x clamps to secure light assembly in position.
- HINT: You can loose fit the top two screw and clamp sets before loading the assembly into the wing to make fit up easier.**

FITTING BULL BAR TO VEHICLE

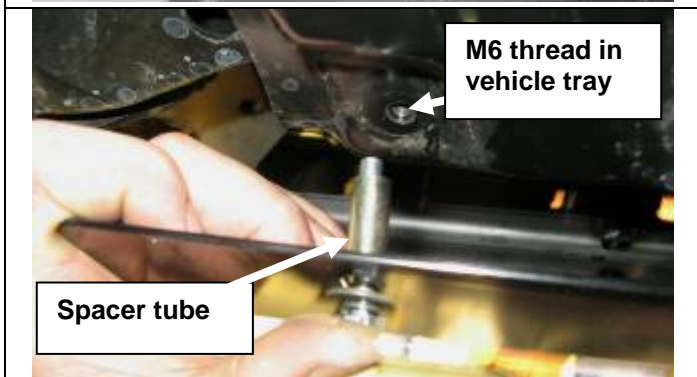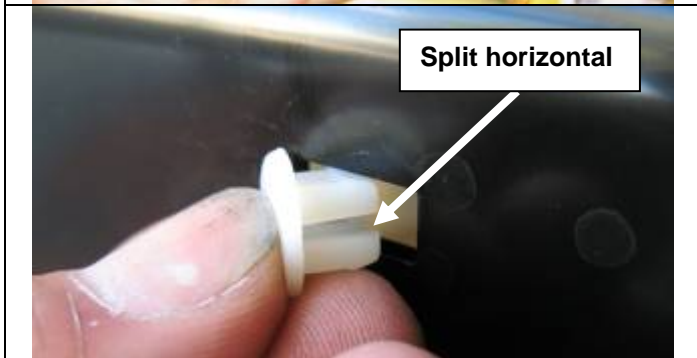	<p>Running lamp wiring</p> <p>Indicator lamp wiring</p>	<p>72. Wire up indicators and parking lamps.</p> <p>73. Connect red wire from supplied loom to green wire from running (parker) lamp. Connect black wire from supplied loom to green/yellow indicator wire. Connect green loom wire to white/black indicator wire.</p> <p>74. Use supplied scotch locks for the electrical connections then secure wiring with cable ties when complete.</p> <p><i>HINT: Temporarily undo the battery clamps and move batteries sideways to gain better access.</i></p> <p>75. Wire up ARB P#6821201 fog lamps if fitted. Connect loom to vehicle socket.</p> <p><i>NOTE: For GXL use ARB Loom MD02 plus switch, for VX and Sahara no extra loom or switching is required. Supplied tails can be joined to OE loom which is run through bull bar.</i></p>
 <p>Check that sensor fits flush</p>	<p>76. If parking sensors to be fitted, insert sleeves first noting that they must be in the same orientation as in the original bumper (tab to top RHS down on LHS).</p> <p>77. Fit sensors checking that they are not too tight, otherwise correct operation may be affected (if tight check hole size and rectify as necessary)</p> <p>78. Connect to main loom and cable tie wiring securely</p>	
 <p>M6 thread in vehicle tray</p> <p>Spacer tube</p>	<p>79. Fit stone tray using 4 x M6 bolts and washer sets at front under bull bar and 2 x M6 x 40 bolts, washers and 18mm long tube spacers at two locations into existing sump guard front section as shown.</p>	
 <p>Split horizontal</p>	<p>80. Fit grommets to slots, with split horizontal as shown</p> <p>81. Fit number plate using supplied pan head screws into grommets.</p>	


FITTING BULL BAR TO VEHICLE

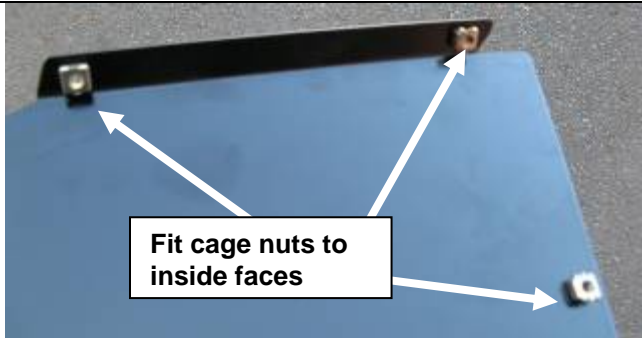

82. Fit 5 x M6 cage nuts to each wing splash panel as shown on **inside** faces.

Note: LHS shown with 3 of 5 cage nuts inserted.

83. Fit panels up inside wings, secure using M6 x 20 black bolts and washer sets. Fix flange on panel to side of main mount bracket using M8 bolt set.

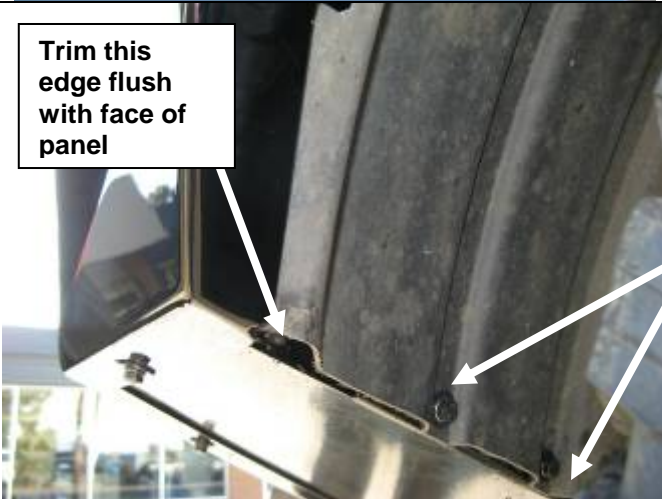

84. Tuck fender liner into wing return. Trim if necessary

85. Mark out and drill 2 x Dia 7.0 mm holes in each fender liner for securing to the splash panel flange.

Hint: Scribe a line on the liner parallel to the splash panel, measure and mark the position of the required holes up from the marked line.

86. Use M6 x 20 black bolts and washer sets to secure the fender liner to the panels.

87. Trim the fender liner end flush with the splash panel face as shown.

Warning: Drilling operations can result in flying debris, safety glasses should be worn.



NOTE:

- ◆ **Connect wiring to fitted lights**
- ◆ **Check operation of all lights.**
- ◆ **Check operation of headlight washers if fitted**
- ◆ **Check operation of parking sensors if fitted**

- ◆ **IMPORTANT: Check that all piping and wiring is clear of sharp edges and pinch points. Adjust any piping to clear the bull bar or mounts by a minimum of 15mm.**

FINAL PRODUCT ON VEHICLE

